


# Shallow Well Total Fluid Recovery

## Geotech Guzzler for Total Fluids

The Geotech Guzzler Total Fluids System is a compact total fluids pumping system designed for shallow well and sump applications with up to 25 ft. (7.6 m) of suction lift. The dual diaphragm pump will provide from 0-4 gpm (0-15 LPM) using from 2-6 cfm (.06-.17 cmm) of air, depending on the suction lift, pumping rate and total discharge head.


### FEATURES

- Pumps a wide viscosity range of fluids
- Variable speed pump matches well recharge rate
- Can be mounted in sumps – 12" (30cm) minimum
- Optional automatic level controls are provided to regulate the operation of the pump
- Robust PVC intake with stainless steel screen to pump nearly any fluid
- Tankfull Shut-Off Sensor
- Optional accessories:  
Level Control Valve  
Air Compressor  
Well Caps  
Tubing

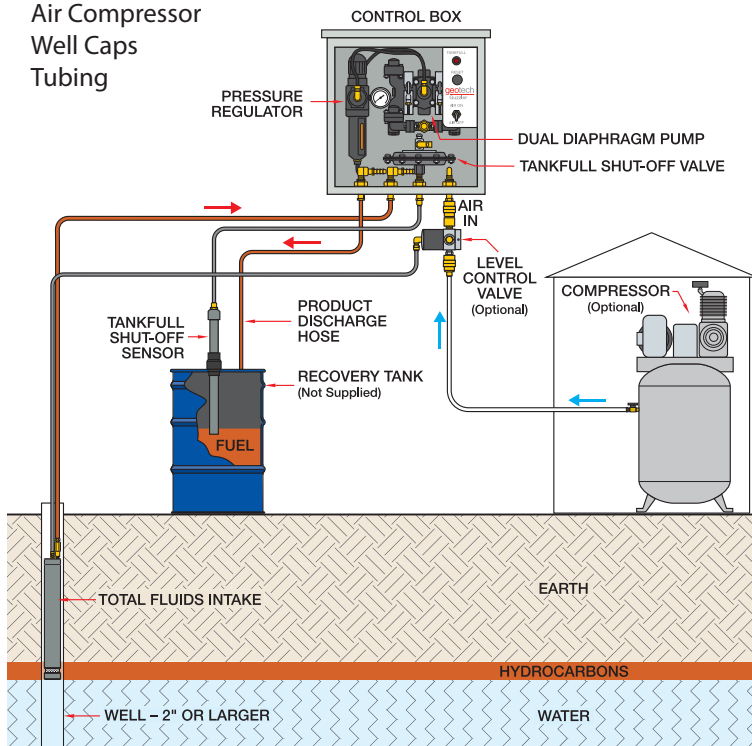

Standard Guzzler Total Fluids System Configuration

*Drawing not to scale*

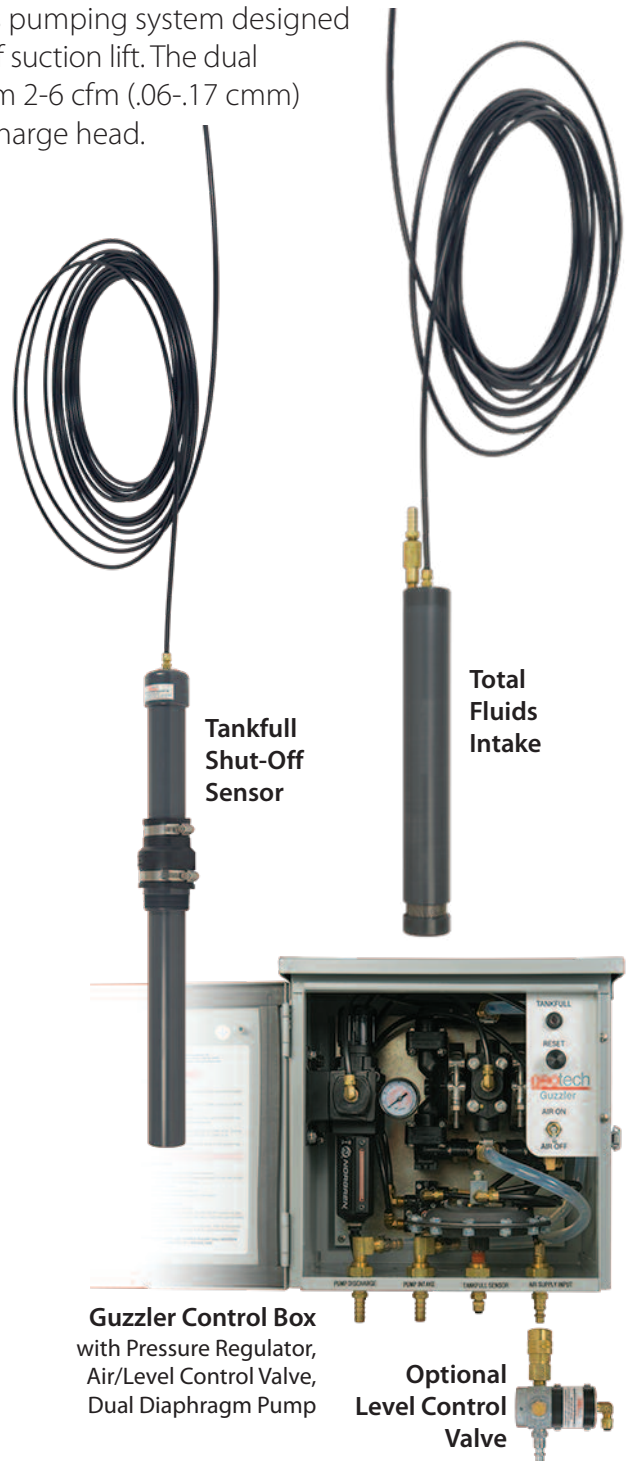

Guzzler Control Box with Pressure Regulator, Air/Level Control Valve, Dual Diaphragm Pump

Optional Level Control Valve

**CALL GEOTECH TODAY (800) 833-7958**

**Geotech Environmental Equipment, Inc.**

2650 East 40th Avenue • Denver, Colorado 80205  
(303) 320-4764 • (800) 833-7958 • FAX (303) 322-7242

email: sales@geotechenv.com website: www.geotechenv.com